

ROLLER SHADES

Dealer Product *Manual.*

Specifications · components · operation · installation

2026 EDITION · v1.0

Confidential — for authorized Superior dealers only

A NOTE FOR DEALERS

Built to quote, built to install, built to *hold the number.*

This manual covers every roller shade system Superior carries — five product families, the fabric library, operation methods, component SKUs, and installation. It's the document you reach for when a customer asks a question you can't answer off the top of your head.

A few ground rules we've tried to honor throughout:

One price sheet. Dimensions in both imperial and metric. Every component labeled with a SKU you can quote directly. Lead times that match the shipping commitments on the website — not aspirational numbers.

The motorized section is in transition. We're moving our drive system to Ronco. Until the new motor pages drop, you'll see placeholders where the old motor content used to live. If a customer asks about motorization before that section ships, call your rep.

HONEST

One price sheet.
No tiers.

MARGIN

Priced for indie shops. Not chains.

SPEED

2 weeks standard.
3 for motorized.

PARTNER

Real reps. Direct phone lines.

TABLE OF CONTENTS

Contents.

SECTION	PAGE
01 Introduction	2
02 Size & Operation Limits	4
03 Fabric Library	5
04 Roll Method	7
05 Clutch Loop Operation	8
06 Cordless Operation	9
07 Motorized Operation · Ronco	10
07.A Motors (4 SKUs)	11
07.B Remotes & Wall Switches	12
07.C Accessories & Smart Home	13
08 CB-181 Roller	14
09 CB-208 Roller	15
10 CB-235 Roller	16
11 CB-268 / 269 Cassette & Double	17
12 CB-282 Roller	19
13 CB-258A Roller	22
14 Bottom Bar & Side Cap Profiles	24
15 Warranty	26

System	Operation	Tube Size	Fabric type	Min. W	Max. W	Max. H
CB-181 Open Roll	Manual	38mm	/	11 3/4"	118"	137 3/4"
	Automatic	38mm	/	21 1/4"	118"	137 3/4"
CB-208 Brushed Open Roll	Manual	38mm	/	11 3/4"	94 1/2"	118"
	Automatic	38mm	Blackout & Sunscreen	21 1/4"	94 1/2"	118"
			Light Filtering	21 1/4"	98 3/8"	137 3/4"
CB-235 Squared Cassette	Cordless	38mm	Blackout & Sunscreen	23 5/8"	94 1/2"	118"
			Light Filtering	23 5/8"	98 3/8"	137 3/4"
	Manual	38mm	Blackout & Sunscreen	11 3/4"	94 1/2"	118"
			Light Filtering	11 3/4"	98 3/8"	137 3/4"
	Automatic	38mm	Blackout & Sunscreen	20 1/8"	94 1/2"	118"
			Light Filtering	20 1/8"	98 3/8"	137 3/4"
CB-268 Squared Cassette	Cordless	38mm	/	19 3/4"	96"	80"
			Mark: Fabric Flaxen Sun FR (DR-B002) series Max. W=74"			
	Manual	38mm	Blackout	11 3/4"	86"	80"
			Light Filtering	11 3/4"	96"	80"
	Automatic	38mm	Blackout	20 1/2"	86"	80"
			Light Filtering	20 1/2"	96"	80"
CB-269 Round Cassette	Cordless	38mm	/	19 3/4"	96"	80"
			Mark: Fabric Flaxen Sun FR (DR-B002) series Max. W=74"			
	Manual	38mm	Blackout	11 3/4"	86"	90"
			Light Filtering	11 3/4"	96"	90"
	Automatic	38mm	Blackout	20 1/2"	86"	90"
			Light Filtering	20 1/2"	96"	90"
CB-282 Fascia	Manual	38mm	Blackout	11 3/4"	86"	100"
			Light Filtering	11 3/4"	96"	100"
		43mm	/	11 3/4"	118"	120"
	Automatic	38mm	Blackout	20 1/2"	86"	100"
			Light Filtering	20 1/2"	96"	100"
		43mm	/	20 1/2"	118"	120"
CB-283 Large Squared Cassette	Manual	38mm	Blackout	11 3/4"	86"	100"
			Light Filtering	11 3/4"	96"	100"
		43mm	/	11 3/4"	118"	120"
	Automatic	38mm	Blackout	20 1/2"	86"	100"
			Light Filtering	20 1/2"	96"	100"
		43mm	/	20 1/2"	118"	120"
CB-258A Dual Roller	Manual	38mm	Blackout	11 3/4"	86"	95"
			Light Filtering	11 3/4"	96"	95"
	Automatic	38mm	Blackout	20 1/2"	86"	95"
			Light Filtering	20 1/2"	96"	95"


Note:

- ① Any shades with a height exceeding 100 inches, the 43mm tube and large cassette will be used.
- ② If the fabric width is less than the system maximum width, then the system use that fabric maximum width should be the fabric width.

Series Name	Material	Shading Effect	Weight	Width
LAMINATED HEMP	100% Polyester	100% Blackout	310g/m ²	110"
CROSSWEAVE	100% Polyester	100% Blackout	305g/m ²	110"
MIDNIGHT MIST	100% Polyester	100% Blackout	310g/m ²	110"
Monochrome Moment (DY-B038 SERIES)	100% Polyester	100% Blackout	310g/m ²	110"
Monochrome Moment (DY-B040 SERIES)	100% Polyester	100% Blackout	265g/m ²	110"
UNADORNED PURE	100% Polyester	60% Blackout	190g/m ²	90"
UNADORNED PURE	100% Polyester	100% Blackout	330g/m ²	90"
CRYSTAL SHEER	100% Polyester	45% Blackout	133g/m ²	118"
GENTLE HUES	100% Polyester	50% Blackout	220g/m ²	118"
SUNKISSED	100% Polyester	70% Blackout	155g/m ²	118"
STARLIGHT SHADE	100% Polyester	60% Blackout	160g/m ²	118"
STARLIGHT SHADE	100% Polyester	100% Blackout	320g/m ²	118"
LUMINOUS LACE	100% Polyester	60% Blackout	240g/m ²	118"
LUMINOUS LACE	100% Polyester	70% Blackout	210g/m ²	110"
LUMINOUS LACE (DY-B38XX SERIES)	100% Polyester	100% Blackout	425g/m ²	118"
LUMINOUS LACE (DY-B032 SERIES)	100% Polyester	100% Blackout	380g/m ²	110"
ATLANTIC SUNSET	100% Polyester	100% Blackout	420g/m ²	110"
ATLANTIC SUNSET	100% Polyester	50% Blackout	205g/m ²	110"
GOLDEN HOUR	100% Polyester	55% Blackout	180g/m ²	118"
TEXTURED NOIR	100% Polyester	100% Blackout	370g/m ²	118"
RADIANT HAZE	100% Polyester	55% Blackout	180g/m ²	110"
TRANQUIL TWILIGHT	100% Polyester	100% Blackout	340g/m ²	110"
CANYON RIDGE	100% Polyester	65% Blackout	220g/m ²	110"
WOVEN LINEN	100% Polyester	100% Blackout	390g/m ²	110"
RIVERSTONE	100% Polyester	100% Blackout	430g/m ²	110"
MOONSHADOW	100% Polyester	100% Blackout	330g/m ²	118"
DREAMWEAVER	100% Polyester	100% Blackout	370g/m ²	118"
TWILIGHT SHIMMER	100% Polyester	100% Blackout	370g/m ²	118"
DOTTED NIGHTFALL	100% Polyester	100% Blackout	400g/m ²	118"
FIREGUARD SUNSCREEN 1%	30% Polyester+70% PVC	80% Blackout	470g/m ²	118"
FIREGUARD SUNSCREEN 3%	30% Polyester+70% PVC	70% Blackout	440g/m ²	118"
FIREGUARD SUNSCREEN 3%	30% Polyester+70% PVC	70% Blackout	440g/m ²	118"
FIREGUARD SUNSCREEN 5%	30% Polyester+70% PVC	60% Blackout	434g/m ²	118"
FIREGUARD SUNSCREEN 5%	30% Polyester+70% PVC	60% Blackout	410g/m ²	118"
FIREGUARD SUNSCREEN 5%	30% Polyester+70% PVC	60% Blackout	410g/m ²	118"
FIREGUARD SUNSCREEN 10%	30% Polyester+70% PVC	50% Blackout	470g/m ²	118"
FIREGUARD SUNSCREEN Blackout	30% Polyester+70% PVC	100% Blackout	663g/m ²	118"

Series Name	Material	Shading Effect	Weight	Width
Urban Grid	100% Polyester	60% Blackout	210g/m ²	118"
Auraline	100% Polyester	60% Blackout	175g/m ²	110"
Sierra Loom	100% Polyester	60% Blackout	205g/m ²	110"
Solora	100% Polyester	60% Blackout	195g/m ²	118"
Solora	100% Polyester	60% Blackout	175g/m ²	90.6"
Layered Calm	100% Polyester	60% Blackout	140g/m ²	118"
Artisan Weave	100% Polyester	60% Blackout	280g/m ²	118"
Linen Gleam	100% Polyester	60% Blackout	155g/m ²	118"
Horizon Woven	100% Polyester	60% Blackout	230g/m ²	118"
Testile Terrain	100% Polyester	60% Blackout	230g/m ²	118"
DORIS	100% Polyester	60% Blackout	230g/m ²	118"
LISS	100% Polyester	60% Blackout	235g/m ²	118"

ROLL METHOD

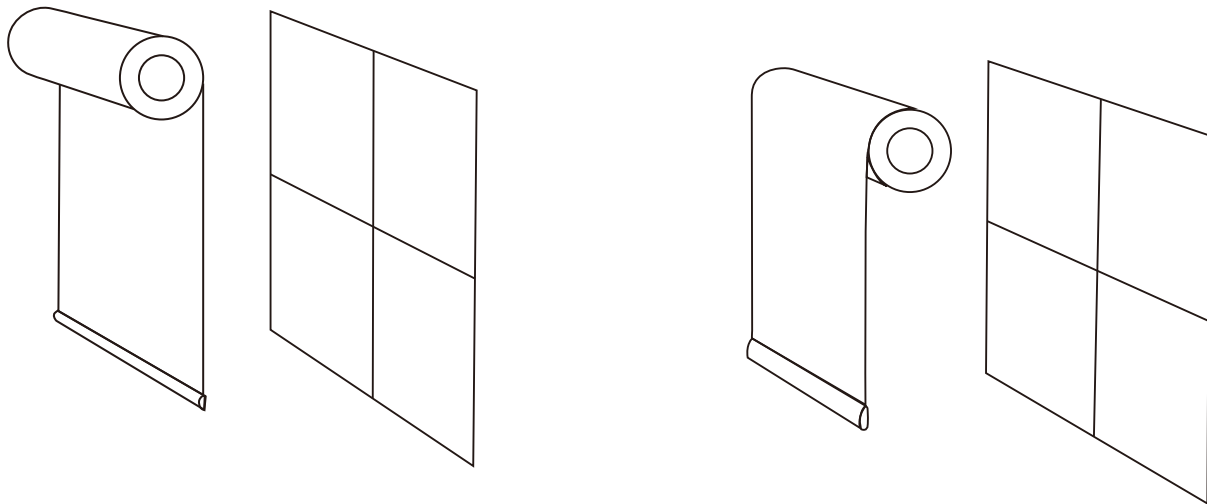


Standard

- The shade deploys and retracts from the bottom.
- The shade lowers from and raises to the bottom.

Reverse




- The shade deploys and retracts from the bottom.
- The shade lowers from and raises to the bottom.
- Difference from Standard is the way to roll the fabric to the tube in the reverse way.


OPERATION STYLE

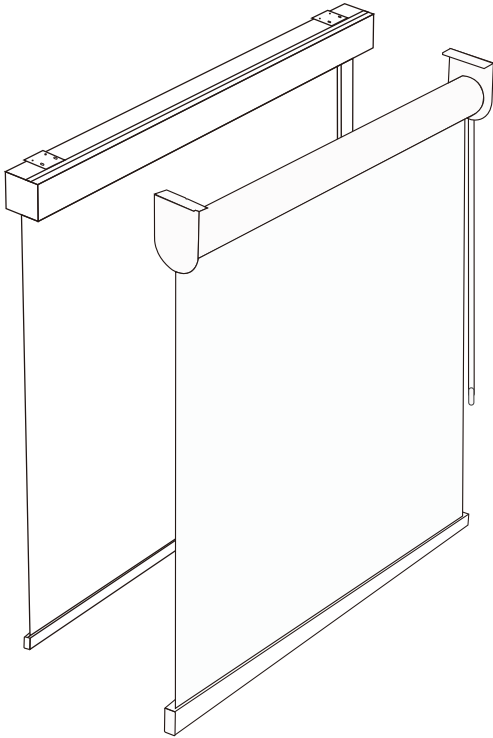

CLUTCH LOOP

Effortless shade adjustment is achieved through a continuous bead chain loop. For added safety, a chain tensioner is included as standard to secure the chain and prevent loose hanging. Available for all systems.

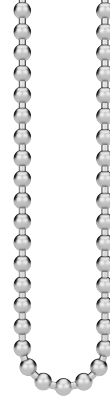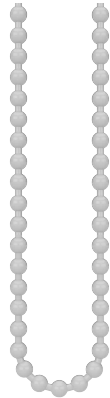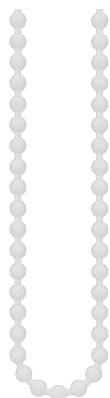

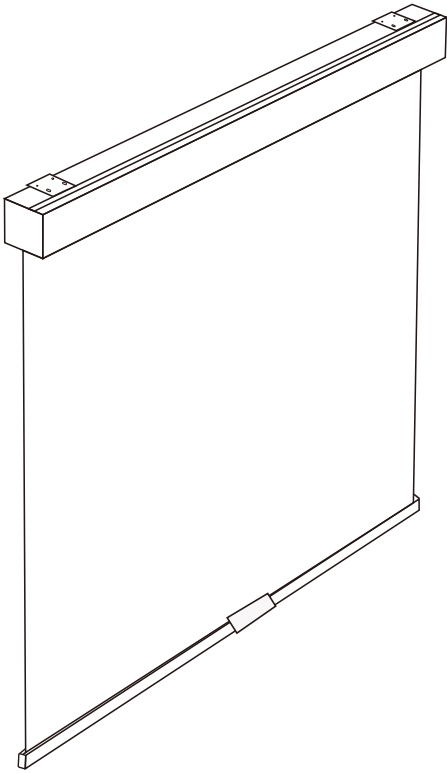


CORDLESS

Achieve perfect lighting with an effortless gesture.

This cordless shade glides smoothly to your desired position with a gentle nudge, creating a sleek, uncluttered look. The absence of loose cords provides a safer environment for homes with children and pets, offering peace of mind alongside elegant style.

Available for 235/268/269/283/258A system.

CORDLESS CONTROL

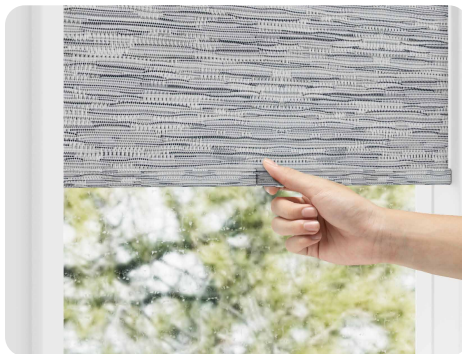

MOTORIZED OPERATION · SECTION 07

Ronco Drive System.

Quiet motors. Honest support. Dealer-first.

Superior's motorized rollers run on the Ronco drive system. We standardized on Ronco because it fits how we quote: one motor family across every tube diameter, controls that pair without a Wi-Fi headache, and parts that stay in stock. This section covers the four motor SKUs we carry, the six controls that drive them, and the smart-home accessories.

BATTERY

Li-ion, 2-cell

RM25-LAQ (1.1Nm)
RM25-LET (0.3Nm short)

For most retrofits. No cord run, solar-panel compatible.

AC PLUG-IN

110-240V

RM25-IE-W1-1.5/20

High torque, continuous duty. IP30, Class A insulation.

LOW-VOLTAGE

12V DC

RM25-OEC-W1-1.1/20

Low-voltage rail installs. Class 2 wiring, 24V adapter.

WHY RONCO

ONE MOTOR FAMILY

25mm across battery, AC, and low-voltage — so one tube spec fits every install type.

QUIET BY DEFAULT

30-38dB operating noise — well under the industry 45dB bar for residential installs.

STOCK, NOT BACKORDER

Ronco holds distributor inventory in North America. No 10-week factory waits.

DEALER-SUPPORTED

Warranty claims go through Superior, not through a foreign motor brand's portal.

IN THIS SECTION


Motors · page 11 Controls · page 12 Accessories · page 13

Questions? hello@superiorwindowcoverings.us

07.A RONCO MOTORS

Motors.


Four SKUs cover every Superior roller install. Spec by fabric weight and power source.

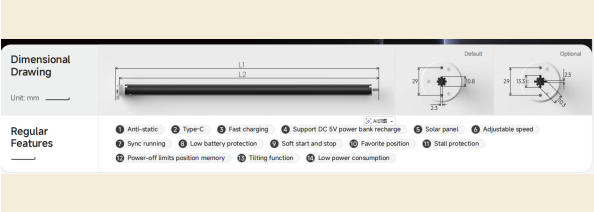

RM25-LAQ-W1-1.1/20
25mm Battery Motor · Standard

Torque	1.1 Nm	Battery	2-Cell Li-ion
Speed	20 / 28 rpm	Noise	32 dB
Run time	6 min @ full	Length L1/L2	485 / 477 mm
Protection	IP20	Charging	5V 2A · USB-C


Standard battery motor. Default spec for retrofits and installs without an outlet.

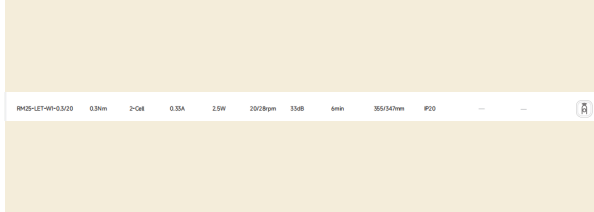

RM25-LET-W1-0.3/20
25mm Battery Motor · Shortest

Torque	0.3 Nm	Battery	2-Cell Li-ion
Speed	20 / 28 rpm	Noise	33 dB
Run time	6 min @ full	Length L1/L2	355 / 347 mm
Protection	IP20	Charging	5V 2A · USB-C


Shortest tube footprint in the family. Use on narrow windows and tight-cassette installs.

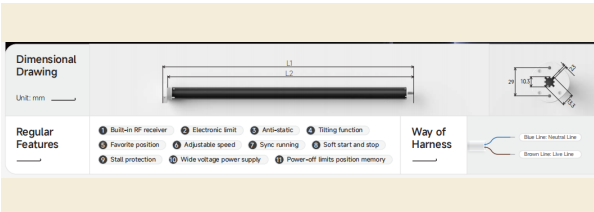

RM25-IE-W1-1.5/20
25mm AC Plug-in Motor · 110-240V

Torque	1.5 Nm	Voltage	AC 100-240V
Speed	20 / 28 rpm	Noise	38 dB
Power	14.4 W	Length L1/L2	514 / 505 mm
Protection	IP30	Insulation	Class A

High-torque AC motor. Continuous duty, ideal for commercial and large-jobs.

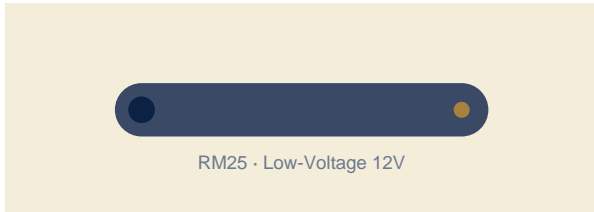

RM25-OEC-W1-1.1/20
25mm Low-Voltage Motor · 12V DC

Torque	1.1 Nm	Voltage	12V DC
Speed	20 / 28 rpm	Noise	36 dB
Power	10.8 W	Length L1/L2	325 / 317 mm
Protection	IP20	Wiring	Class 2


Low-voltage for multi-motor installs. Pairs with Ronco Low-Voltage Panel on a single run.

07.B REMOTES & WALL SWITCHES

Controls.


Pair any control with any Ronco motor. Program up to 15 channels per remote.

REMOTES

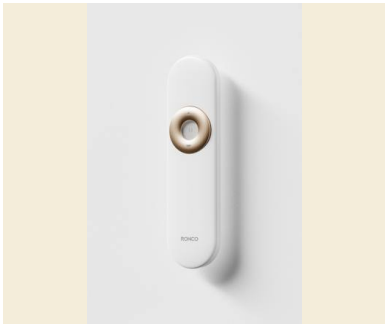


RE301
Single-Channel Remote

- 1 channel
- RF 433MHz
- 2x AAA
- Pair via motor

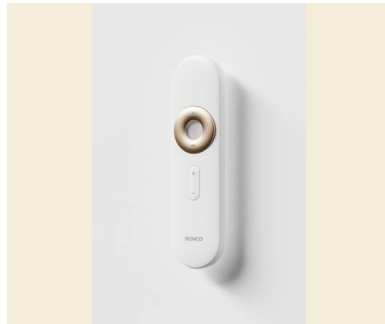

RE302
Dual-Channel Remote

- 2 channels
- RF 433MHz
- 2x AAA
- Pair via motor

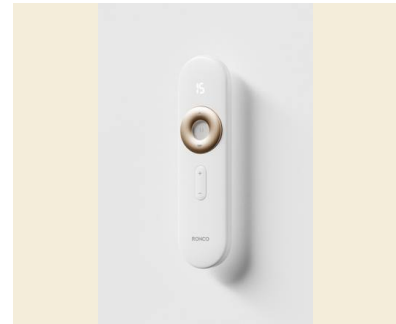

RE315
15-Channel Remote


- 15 channels
- OLED display
- 2x AAA
- Group assign

WALL SWITCHES




RE201
Single-Channel Wall Switch

- 1 channel
- 86mm EU plate
- CR2450
- Surface mount

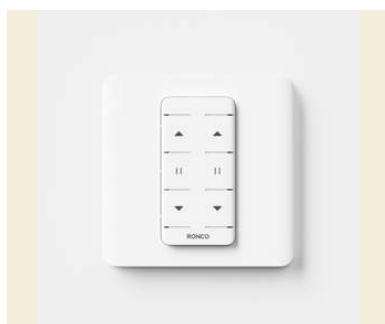

RE202
Dual-Channel Wall Switch

- 2 channels
- 86mm EU plate
- CR2450
- Surface mount

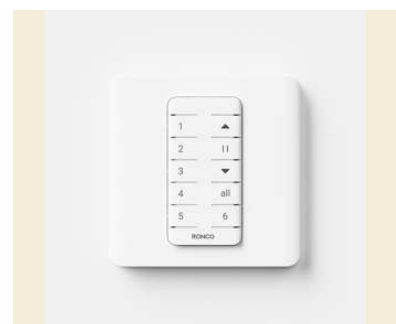


RE206
6-Channel Wall Switch

- 6 channels
- 86mm EU plate
- CR2450
- Surface mount

07.C ACCESSORIES

Smart home & power.

Optional accessories that extend the Ronco system into smart home and power-delivery.



RE500

Ronco Wi-Fi Hub


PAIRS
Alexa · Google · Ronco App

POWER
USB-C 5V 2A

CONNECTIVITY
Wi-Fi 2.4GHz + RF

CAPACITY
Up to 30 motors

Required for app control, scenes, and voice integration. One hub per household.

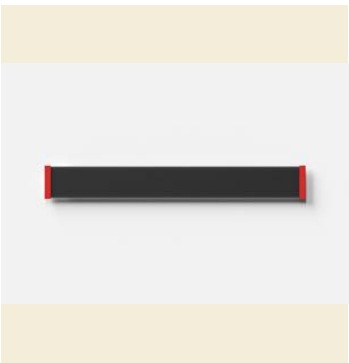

REP130

Solar Panel


VOLTAGE
5V DC

MOUNT
Indoor window-face

CABLE
3 m

PAIRS WITH
All RM25 battery motors

Trickle-charges battery motors off ambient window light. Eliminates recharge cycles on south-facing windows.



—

Low-Voltage Panel

OUTPUT
12V DC

PAIRS WITH
RM25-OEC 12V motors

CHANNELS
Multi-drop rail

INSTALL
Recessed / on-wall


Power distribution for multi-motor 12V installs. One panel can drive a whole room.

PAIRING OR CONFIG QUESTION?

Call your rep. Same-day callback.


hello@superiorwindowcoverings.us

Roller Shades

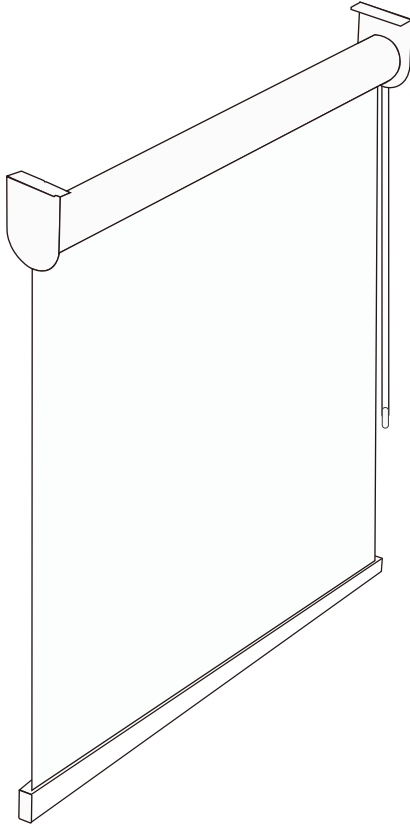


CB-181

Produce Standard			
Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-32mm -1 1/4"	-32mm -1 1/4"	-32mm -1 1/4"
· Motorization	-32mm -1 1/4"	-32mm -1 1/4"	-32mm -1 1/4"

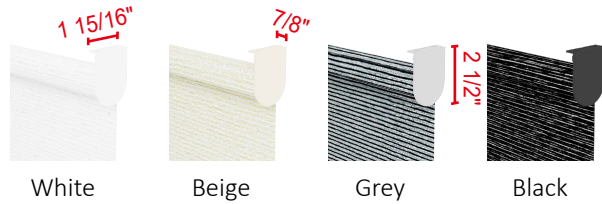

Installation Bracket I-181

Spec: 22*50*63mm | 7/8" * 1 15/16" * 2 1/2"
Material: Alu
Color: Four colors




Tube T-004

Spec: Ø38mm | 1 1/2" Thickness: 2.0mm
Material: Alu
Color: Alu



Bottom Bar T-988

Spec: 34*13.6mm | 1 3/8" * 9/16"
Material: Alu
Color: Alu (4 color end cap available)



Mechanism I-181

Spec: K-55
Material: POM
Color: Four colors



Bead Chain G-001

Spec: Ø4.5mm*6mm
Material: POM
Color: Four colors



Safety Handle E-036A

Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent




Motor RM25LE

Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm



Remote RE315


Model: RE315
15 Channels
RF 433MHz

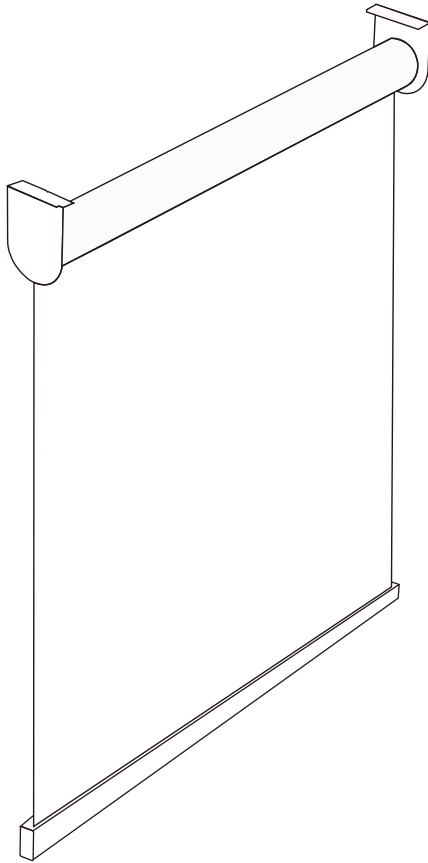

CB-208

Produce Standard

Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-36mm -1 7/16"	-40mm -1 9/16"	-38mm -1 1/2"
· Motorization	-30mm -1 1/4"	-35mm -1 3/8"	-33mm -1 5/16"




Brushed



Installation Bracket I-208

Spec: 24*55*68mm | 1 5/16" * 2 3/16" * 2 11/16"
Material: Alu
Color: Brushed



Tube T-056B

Spec: \varnothing 38mm | 1 1/2" Thickness: 2.0mm
Material: Alu
Color: Brushed



Bottom Bar T-782

Spec: 34.5*8.5mm | 1 3/8" * 3/8"
Material: Alu
Color: Brushed



Head Mechanism I-208-01

Spec: /
Material: Alu
Color: Brushed



Tail Mechanism I-208-02

Spec: /
Material: Alu
Color: Brushed



Bead Chain G-001

Spec: \varnothing 4.5mm*6mm
Material: POM
Color: Four colors



Safety Handle E-036A

Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent



Motor RM25LE


Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm



Remote

RE315


Model: RE315
15 Channels
RF 433MHz

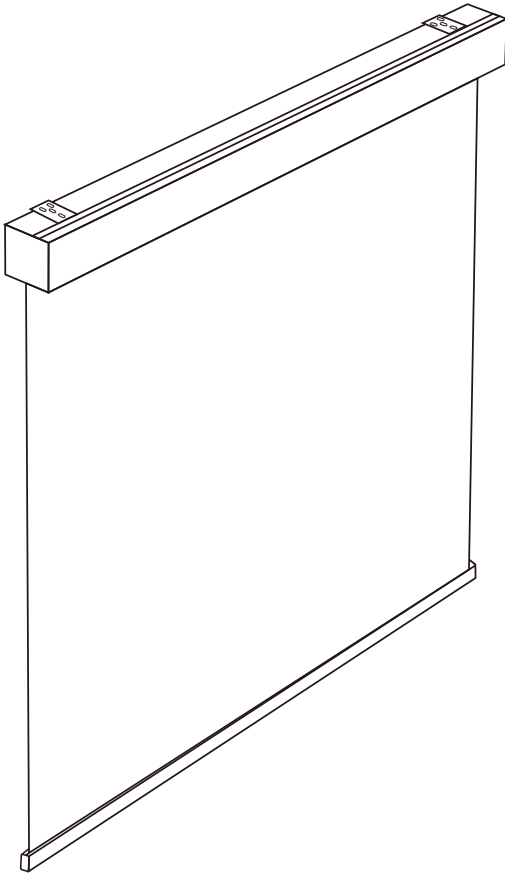


CB-235

Produce Standard

Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-26mm -1"	-30mm -1 1/4"	-28mm -1 1/8"
· Cordless	-18mm -1 1/16"	-21mm -1 3/16"	-20mm -3/4"
· Motorization	-26mm -1"	-30mm -1 1/4"	-28mm -1 1/8"

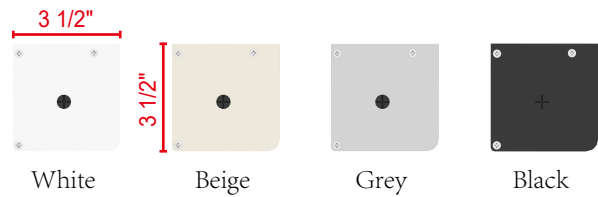


Cassette T-928
Spec: 88*88mm | 3 1/2" * 3 1/2"
Material: Alu
Color: Four colors




Tube T-004
Spec: ∅38mm | 1 1/2" Thickness: 2.0mm
Material: Alu
Color: Alu



Bottom Bar T-988
Spec: 34*13.6mm | 1 3/8" * 9/16"
Material: Alu
Color: Alu (4 color end cap available)



Side Caps P-I-235A-A01/A02
Spec: 88*88mm | 3 1/2" * 3 1/2"
Material: PA6+15%GF
Color: Four colors



Spring Set I-235A
Spec: /
Material: /
Color: /



Head Mechanism I-235A-03
Spec: /
Material: /
Color: White



Tail Mechanism I-235A-04
Spec: /
Material: /
Color: White



Bead Chain G-001
Spec: ∅4.5mm*6mm
Material: POM
Color: Four colors




Safety Handle E-036A
Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent




Motor RM25LE
Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm



Remote RE315
Model: RE315
15 Channels
RF 433MHz





Installation Bracket H-241
Spec: /
Material: nickel plating
Color: nickel plating

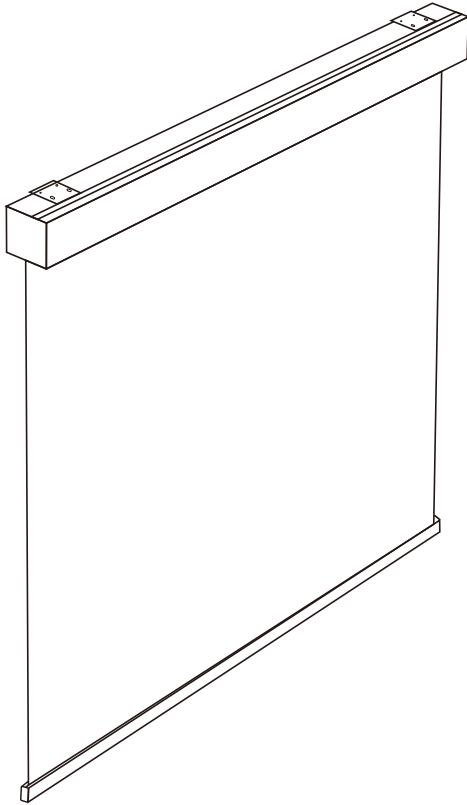

CB-268/269


Produce Standard

Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-26mm -1"	-30mm -1 1/4"	-28mm -1 1/8"
· Cordless	-23mm -7/8"	-27mm -1 1/4"	-23mm -7/8"
· Motorization	-22mm -7/8"	-26mm -1"	-24mm -15/16"

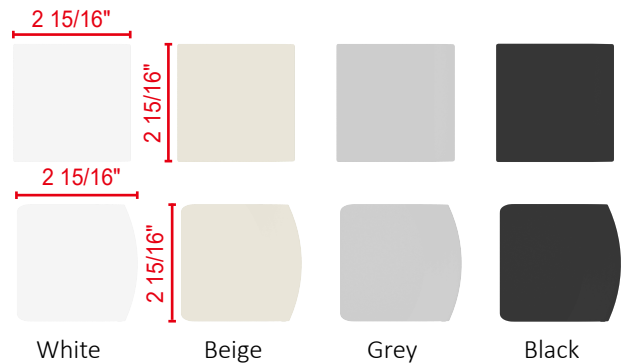

Cassette T-1015/1018

Spec: 75*75mm | 2 15/16" * 2 15/16"
Material: Alu
Color: Four colors



Tube T-004

Spec: \varnothing 38mm | 1 1/2" Thickness: 2.0mm
Material: Alu
Color: Alu



Bottom Bar T-988

Spec: 34*13.6mm | 1 3/8" * 9/16"
Material: Alu
Color: Alu (4 color end cap available)



Side Caps I-268(269)-A03/A04

Spec: 75*75mm | 2 15/16" * 2 15/16"
Material: PA6+15%GF
Color: Four colors



Spring Set I-240C-A02

Spec: /
Material: /
Color: /



Head Mechanism I-266-A01

Spec: /
Material: /
Color: /



Tail Mechanism I-219-A02

Spec: /
Material: /
Color: /



Bracket I-258-10

Spec: /
Material: Q235
Color: powder coating



Adjustable bracket (cordless) I-269-A02

Spec: /
Material: /
Color: /



Bead Chain **G-001**

Spec: \varnothing 4.5mm*6mm
Material: POM
Color: Four colors



Safety Handle **E-036A**

Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent




Motor **RM25LE**

Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm




Remote **RE315**

Model: RE315
15 Channels
RF 433MHz




Installation Bracket **H-275**

Spec: /
Material: /
Color: /

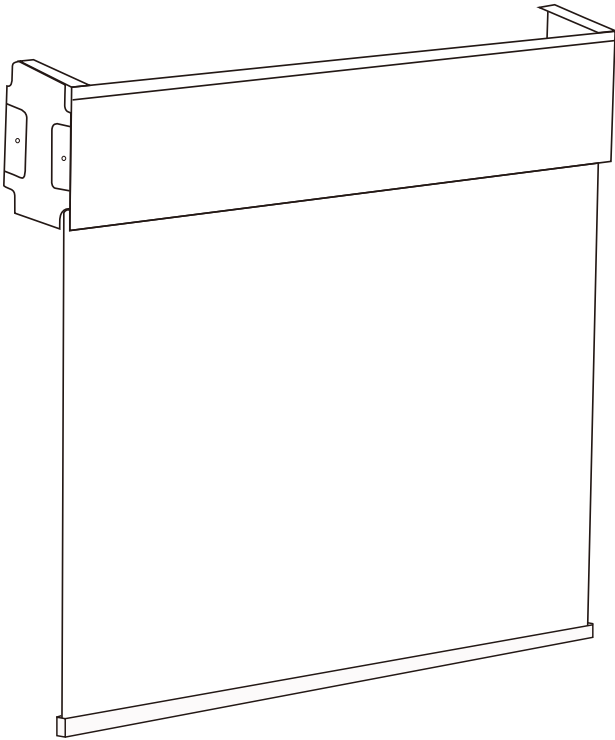


CB-282

Produce Standard			
Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-38mm -1 1/2"	-40mm -1 9/16"	-38mm -1 1/2"
· Motorization	-33mm -1 5/16"	-35mm -1 3/8"	-33mm -1 5/16"

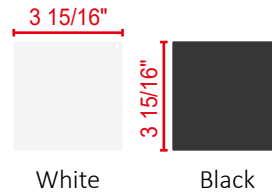

White Black




Tube **T-004**

Spec: \varnothing 38mm | 1 1/2" Thickness: 2.0mm
Material:Alu
Color:Alu




Bottom Bar **T-988**

Spec:34*13.6mm | 1 3/8" * 9/16"
Material:Alu
Color:Alu (4 color end cap available)



Cassette **T-1025**

Spec:94.9*17.5mm | 3 3/4" * 3/4"
Material:Alu
Color:Four colors



Side Caps **I-282-05**

Spec:100*100mm | 3 15/16" * 3 15/16"
Material:Q235
Color:Four colors



Bracket for Tail Mechanism
I-282-A02

Spec:96*96.8*25mm | 3 3/4" * 3 13/16" * 1"
Material:/
Color:/



Tail Mechanism **I-258-A02**

Spec:/
Material:/
Color:/



Bracket for Head Mechanism
I-282-A01

Spec:96*96.8*25mm | 3 3/4" * 3 13/16" * 1"
Material:/
Color:/



Head Mechanism **I-266-A01**

Spec:/
Material:/
Color:/



Bead Chain **G-001**

Spec: \varnothing 4.5mm*6mm
Material:POM
Color:Four colors



Safety Handle **E-036A**

Spec:51*15*21mm | 2" * 9/16" * 7/8"
Material:PG-33
Color:Transparent




Motor **RM25LE**

Model:RM25LE
Battery:Li-ion rechargeable
Tube:25mm



Remote **RE315**

Model:RE315
15 Channels
RF 433MHz

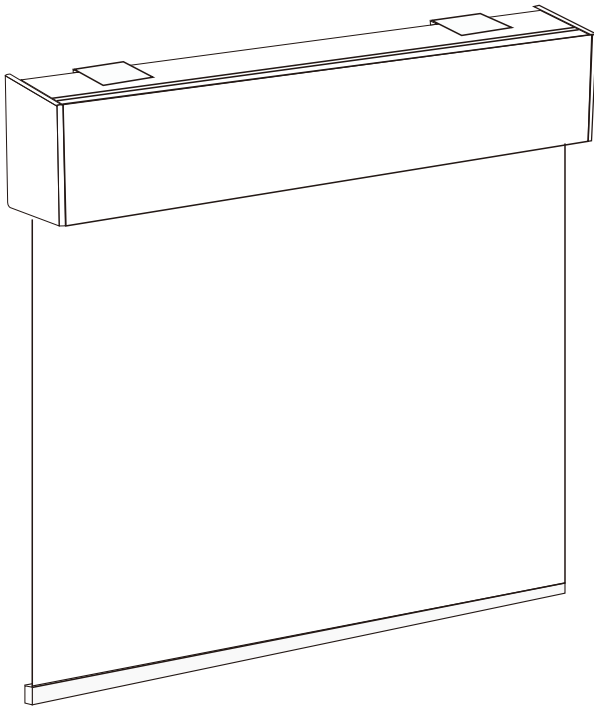

CB-283

Produce Standard			
Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-28mm -1 1/8"	-30mm -1 1/4"	-28mm -1 1/8"
· Cordless	-16mm -5/8"	-22mm -7/8"	-22mm -7/8"
· Motorization	-24mm -1 5/16"	-26mm -1"	-24mm -1 5/16"



Tube T-007
Spec: \varnothing 43mm | 1 11/16" Thickness: 2.0mm
Material: Alu
Color: Alu

Bottom Bar T-988
Spec: 34*13.6mm | 1 3/8" * 9/16"
Material: Alu
Color: Alu (4 color end cap available)

Cassette T-1027&T-1028
Spec: 106*106mm | 4 3/16" * 4 3/16"
Material: Alu
Color: Four colors

Side Caps I-283-02&I-283-03
Spec: 106*106mm | 4 3/16" * 4 3/16"
Material: PVC
Color: Four colors

Bracket I-283-01
Spec: 94*85*25mm | 3 11/16" * 3 3/8" * 1"
Material: Q235
Color: nickel plating

Head Mechanism I-266D-A01
Spec: /
Material: /
Color: /

Tail Mechanism I-283-A01
Spec: /
Material: /
Color: /

Spring Set /
Spec: /
Material: /
Color: /

Bead Chain G-001
Spec: \varnothing 4.5mm*6mm
Material: POM
Color: Four colors



Safety Handle E-036A

Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent




Motor RM25LE

Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm




Remote RE315

Model: RE315
15 Channels
RF 433MHz



Installation Bracket H-276

Spec: /
Material: /
Color: /

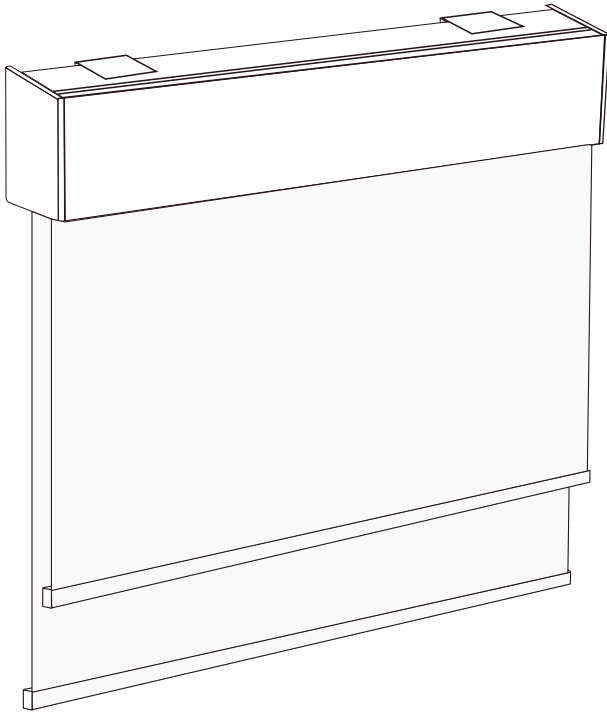

CB-258A

Produce Standard

Control Options	Tube	Fabric	Bottom Bar
· Clutch Loop	-38mm -1 1/2"	-40mm -1 9/16"	-39mm -1 9/16"
· Cordless	-25mm -1"	-27mm -1 1/4"	-29mm -1 1/8"
· Motorization	-35mm -1 3/8"	-37mm -1 7/16"	-35mm -1 3/8"

4 3/4"



White

5 1/2"




Beige



Grey



Black



Tube T-004

Spec: \varnothing 38mm | 1 1/2" Thickness: 2.0mm
Material: Alu
Color: Alu



Bottom Bar T-988

Spec: 34*13.6mm | 1 3/8" * 9/16"
Material: Alu
Color: Alu (4 color end cap available)



Cassette T-955

Spec: 120*140mm | 4 3/4" * 5 1/2"
Material: Alu
Color: Four colors



**Side Caps
I-258A-03 & I-258A-04**

Spec: 120*140mm | 4 3/4" * 5 1/2"
Material: ABS+20%PVC
Color: Four colors



**Bracket for Tail Mechanism
I-258A-A03**

Spec: /
Material: /
Color: /



Tail Mechanism I-258-A02

Spec: /
Material: /
Color: /



**Bracket for Head Mechanism
I-258A-A02**

Spec: /
Material: /
Color: /



Head Mechanism I-258-A01

Spec: /
Material: /
Color: /

Spring Set /

Spec: /
Material: /
Color: /



Bead Chain **G-001**

Spec: \varnothing 4.5mm*6mm
Material: POM
Color: Four colors



Safety Handle **E-036A**

Spec: 51*15*21mm | 2" * 9/16" * 7/8"
Material: PG-33
Color: Transparent



Motor **RM25LE**

Model: RM25LE
Battery: Li-ion rechargeable
Tube: 25mm




Remote **RE315**

Model: RE315
15 Channels
RF 433MHz







Installation Bracket **H-260**

Spec: /
Material: /
Color: /

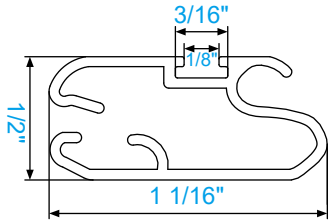

T-795




White





Beige

Grey

Black

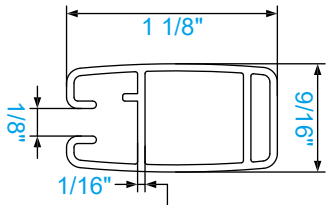

T-798D




White





Beige

Grey

Black

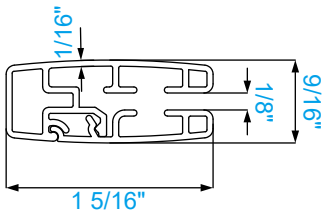

T-988



White

Beige

Grey

Black



THE SUPERIOR WARRANTY

Roller Shades *Limited Lifetime Warranty.*

LIMITED LIFETIME COVERAGE

This product is warranted against defects in materials and workmanship under the conditions set out below.

All manufacturer recommendations regarding product limitations and specifications have been followed.

The manufacturer reserves the right to determine whether a repair or partial replacement of parts is warranted. If necessary, the manufacturer will replace the shade with a new one of equal or greater value. This replacement constitutes your exclusive remedy under the terms of this warranty.

EXCLUSIONS & LIMITATIONS

All motors, controls, and accessories are covered by a separate warranty valid for five (5) years from the original date of purchase.

Failure to correctly install, change, operate, or maintain motors, controls, electrical and related systems, per the manufacturer's instructions, will void the warranty.

This warranty is valid only for the original retail purchaser and requires proof of purchase.

This warranty does not cover:

- Costs or damages associated with the removal or installation of replacement shades.
- Damage caused by improper installation, cleaning, or abuse.
- Damage resulting from improper use, including excessive weight loading or impact.
- Normal wear and tear.
- Accidental, intentional, or commercial damage.

YOUR RIGHTS UNDER STATE LAW

This warranty provides you with specific legal rights, which may vary from state to state. The manufacturer shall not be liable for incidental or consequential damages. Some states do not allow the exclusion or limitation of such damages. State laws may limit or disallow certain limitations of liability. Please consult the laws of your state for full details.